

Rapid Communication

A Method for Preparation of Desulfurizing Biomass and Bioupgraders from Crude Oil

Wisam Mohammed Kareem Al-Khazaali^{1,2}; Seyed Ahmad Ataei^{2*}

¹Chemical Engineering Sec., Designs Dept., Projects Div., Misan Oil Company, Misan, Iraq

²Department of Chemical Engineering, Faculty of Engineering, Shahid Bahonar University of Kerman, Kerman, Iran

*Corresponding author: Seyed Ahmad Ataei

Department of Chemical Engineering, Faculty of Engineering, Shahid Bahonar University of Kerman, Kerman, Iran.

Email: ataei@uk.ac.ir

Received: October 18, 2023

Accepted: November 15, 2023

Published: November 22, 2023

Abstract

Emissions from human activities contribute to air pollution, global warming, and environmental degradation. These effects can harm human health and ecosystems, underscoring the importance of sustainable practices to mitigate the impact of emissions on the environment. By the time on the first exploration of reservoirs and first design contracts dates of refineries, there are many challenges appeared on the health, safety, and environment by conduction of the oil such as the higher contents of sulfur, nitrogen, oxygen, halogen, metals, and aromatics. There are many side effects on the human health starting from the simple to the malignant diseases such as cancer. Also, the safety of equipment and catalysts are affected by the presence of high content of these impurities in oils by many phenomena such as corrosion, erosion, and poisoning. In this study, microorganisms' colony has been isolated from Amara crude oil by using 9k medium (ATCC 2436). It was found that this colony has the ability to make Biodesulfurization (BDS) of crude oil from 4.4 to 3.845 %. Also, it was found that this isolated colony upgraded the oil in improvement API-density.

Keywords: Biodesulfurization; Biodegradation; Isolation; 9k medium; *Acidithiobacillus ferrooxidans*; *Thiooxidans*

Introduction

Fossil fuel is an important source of energy or power in various fields in life and industry. Before applying it in use, it must be on specification of some related standards to avoid risks on HSE. Then, sulfur compounds are one of these constraints to be treated. Fossil fuels take many forms, ranging through crude oil, petroleum fractions, coal, tar sands, and shale oil. In order to compete the sources of clean energy, fossil fuels must care HSE, quantity assurance and quality control regulations (QQHSSE). Emissions of sulfur has resulted in related health issues due to the poor safety of corrosion leading to its leakage to the environment, like: heart diseases, asthma, and respiratory illnesses [1]. Acute toxicity by H₂S, which has caused many deaths in the workplace and in areas of natural accumulation. Also, loss of consciousness by H₂S, paralysis, and even death, and disorders of the nervous system by H₂S exposure, and in cardiovascular, gastrointestinal, and ocular disorders [2].

Emission of SO_x leading to serious environmental issues after combustion or due to the poor safety of corrosion, such as acid rain, a deposition of acids that is harmful to agriculture, wildlife, and human health and severe air pollution [1]. However, the combustion of fossil fuels releases many hazardous components such as SO_x, NO_x, CO₂ [3]. Emissions of H₂S leading to air pollution [4].

Therefore, EPA limited the total content of sulfur to 15 ppm in diesel and 30 ppm in gasoline. While EU limited to 50 ppm for both of them [4,5].

Sulfur compounds in oils formulate a challenge towards the human being locally and globally, whereas its oxides may reach 2.28 ppm in Baghdad [6]. Whereas, the total content of sulfur in Iraq exceeded all the percentages of other countries as shown in Figure 1 [7].

These are many methods for treating that. BDS is a process that is based around bacterial potential. In this process, bacteria remove organosulfur from oil fractions without degrading the carbon skeleton of the compounds. BDS operates at ambient temperature and pressure with high selectivity, resulting in decreased energy costs, low emission and no generation of undesirable side-products. For assessing the potential of BDS as a biorefining process, pilot plants have been operated [8]. BDS is one of the modern biotechnology sciences which deal with the solving the contaminants of oils such as crude oil, its derivatives, and coal too. The content of sulfur causes various problems of health, safety, and environments, then it decrease the products quality and sustainability. In this treatment, it is necessary to test the concentration of sulfur and other biologi-

Table 1: Preferential of thiobacillus strains on the 9k medium and similar [11].

Microorganism	Name	Microorganism codes	Medium codes	pH	Remarks
<i>Acidithiobacillus ferrooxidans</i>	<i>Acidithiobacillus ferrooxidans</i>	PTCC 1646 DSM 583	PTCC 105	1.4	Same 9k
	<i>Acidithiobacillus ferrooxidans</i>	PTCC 1647	PTCC 106 PTCC 132	2-2.3	9k medium
	<i>Acidithiobacillus ferrooxidans</i>	PTCC 1746 ATCC 23270 DSM 14882	PTCC 105 PTCC 132	1.4 1.8	Same 9k
<i>Acidithiobacillus thiooxidans</i>	<i>Thiobacillus thioparus</i>	PTCC 1668 DSM 5368	PTCC 158	6.6	Same constitutes of 9k medium
	<i>Acidithiobacillus thiooxidans</i>	PTCC 1692 ATCC 8085 IFO 12544 NBRC 12544 NCIMB 9112	PTCC 119	4.2	Same positive roots and different negative bases.
	<i>Acidithiobacillus thiooxidans</i>	PTCC 1717 DSM 9463	PTCC 123	3.5	Same

cal indicators before, after, and through the treatment. The following sections show these important tests.

To achieve that limitations of quality, there are many methods such as ODS and HDS. In this study, BDS is presented and evaluated. While to achieve the limitations of pollution of soil, there are some methods such as biodegradation.

The isolates of microorganisms from crude oil were identified as *Acidithiobacillus* strains as provided in Figure 2, Figure 3, Table 1. Also these strains gave biodesulfurization and biodegradation pathways as shown in Figure 4.

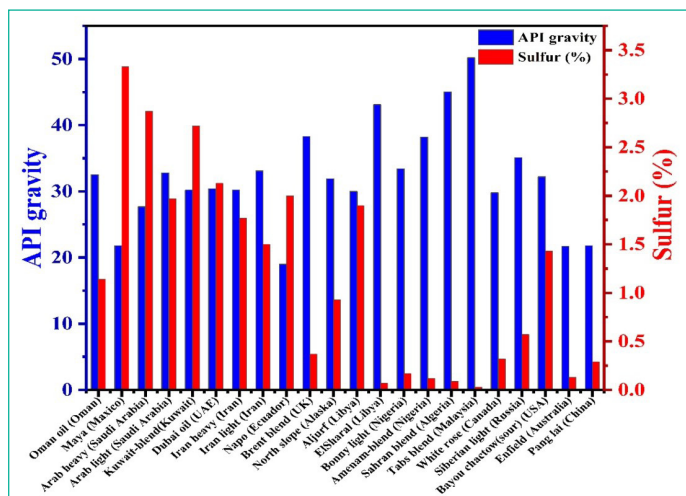


Figure 1: Total content of sulfur and API-density of various countries lower than Iraq.

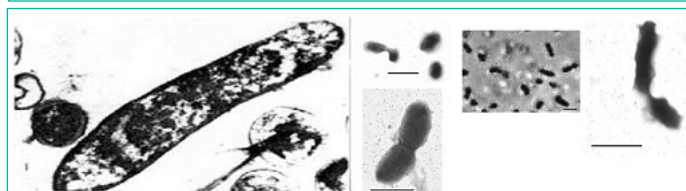


Figure 2: Proposed morphology of isolated microorganisms. (a) *Acidithiobacillus ferrooxidans* magnification 30,000 times. [Henry Lutz Ehrlich, Geomicrobiology, 2nd edition, (New York: Marcel Dekker, 1990)] (b) *Acidithiobacillus thiooxidans* isolated by 9k medium [9].

Table 2: Effect of incubation on the physical and chemical properties.

	Initial	Final	Unit
Total content of sulfur	4.4	3.845	%
Total content of salts	49.36	40	g/l
pH	2	1.75	-
Electric conductivity	155	88	μS/cm
API-Density	23.6	22.5	API

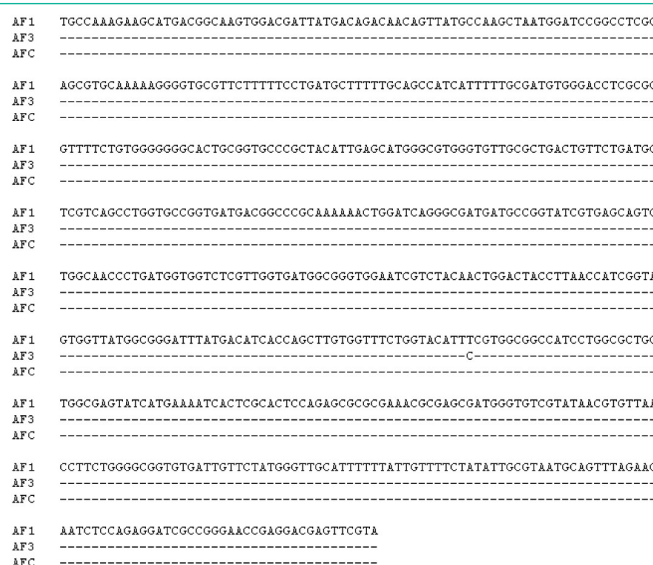


Figure 3: Alignment of the nucleotide sequences of the *coxC* genes from named AF1, AF3 and AFc strains [10].

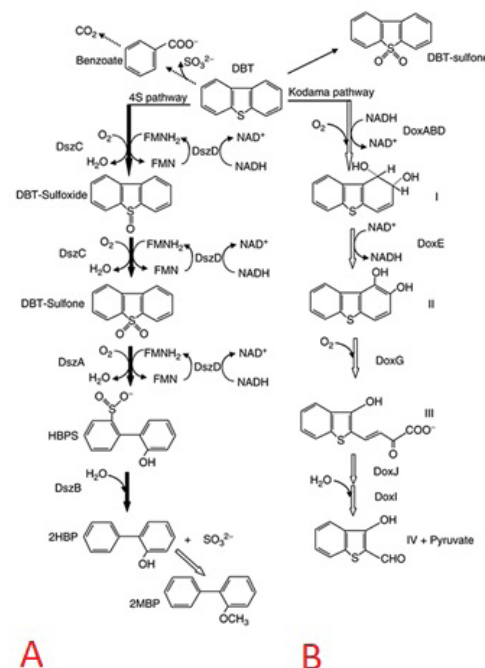


Figure 4: Typical metabolism pathways [Moheballi]. (a) The 4S pathway (black thick arrows) and the extended 4S pathway (white arrow). (b) The C-C cleavage pathway that releases sulfur (dotted thin arrows), (3) the sulfur-oxidation pathway (black thin arrow) and (4) the Kodama pathway (dotted thick arrows).

Materials and Methods

A sample of crude oil was brought from storage tanks in Amara Oilfield from Iraq and iron concentrate from mountains of Kerman in Iran. These samples should not be sterilized in order not affecting the microorganisms in it. A 5-litre was withdrawn to cover all the experiments. The culture 9k medium (ATCC 2436 or PTCC 106) was used in the isolation. This medium is composed of $\text{FeSO}_4 \cdot 7\text{H}_2\text{O}$ 45g, glucose 10g, $(\text{NH}_4)_2\text{SO}_4$ 3g, K_2HPO_4 0.75g, $\text{MgSO}_4 \cdot 7\text{H}_2\text{O}$ 0.5, KCl 0.1g, CaNO_3 0.01g. This medium is prepared separately with $\text{FeSO}_4 \cdot 7\text{H}_2\text{O}$ in order to avoid the sedimentation of it after the sterilization. pH of this solution must be adjusted to 5.5 with H_2SO_4 then autoclaved at 120°C and pressure 15 psi for 20 minutes. While the $\text{FeSO}_4 \cdot 7\text{H}_2\text{O}$ solutions is sterilized by using microfilter (0.4 μm) and adjusted pH 1.4 by H_2SO_4 . After cooling, they were mixed and kept in a dark place.

The emulsifier or surfactant Tween 20 was used in order to make dispersion of oil phase in the aqueous phase. In this study, the 9k medium was used for each of isolation culture, growth, and incubation XRF analyzer was used for measurement of the total content of sulfur in the crude oil. The sulfur measurement was tested by Misan Oil Company and Asfahan University. Also, some decanters was used in the primary separation. The centrifuge was used for deeply purification of separation as a secondary stage. Finally, a reverse-emulsifier was used in the tertiary separation such as n-heptane.

IP 77 and STM D473 have been used to ensure the crude oil is free of salts and sediments respectively. This is important for the selectivity of significant microorganisms comprised with salts and constitutes of applied medium which is 9k medium. Also, ASTM D4006 was used to make sure of oil is not wet. ASTM D1298 and ASTM D5002 had been applied to measure the density. All these tests have been reported from Misan Oil Company.

The operation conditions must be carefully selected to study the upgrade and improvement of heavy crude oil such as the temperature, speed of rotation, pH, oil water ratio (OWR), and the surfactant dose, and the time of isolation, cultivation, and incubation. the isolation was done by using a solidified 9k medium with agar 1.5%. The operation conditions for the isolation were temperature 30°C and time 3 day. The initial conditions of incubation were speed of rotation 150 rpm, temperature 35°C , OWR 5%, surfactant dose 1% of oil volume, time 3 day.

Results

The colony was isolated firstly by using the solidified 9k medium in a petridish. Then inoculated in Erlynmeyer for decreasing the growth in the incubator. The strains was Yellow Form Colony (YFC). As shown in Figure 5.

The Metabolism Ability

The incubation biomixture was made by using Erlynmeyer 250 ml as shown in Figure 5C. The metabolism reaction ability was found according to the change in measurement of total content of sulfur, salts, pH, electric conductivity, and density. Based on the XRF analysis of the treated and untreated crude oil, it was found the capability of bio-upgrade and bio-improvement for the applied microorganisms on the crude oil from Amara oilfield. It was that the isolated colony from Amara Oilfield is able to make the desulfurization of oil. Table 2 shows the results of before and after the incubation of crude oil by the colony.

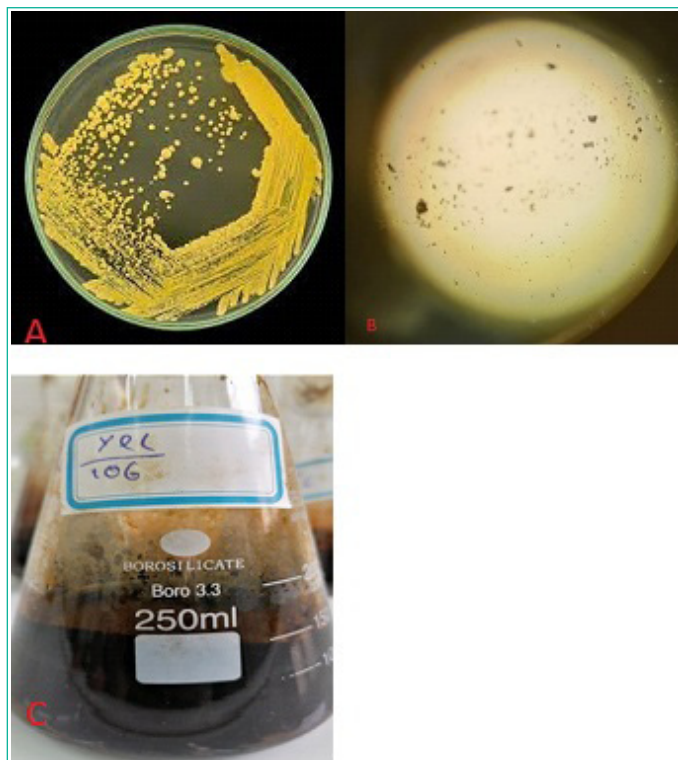


Figure 5: Bio-mixture of isolated colony supplemented by 9k medium. (a) Isolation of colony from oil and concentrate with gell medium solidified by agar 1.5%. (b) Inoculation and adaptation by some drops of crude oil as sole source of sulfur. (c) Incubation of crude oil assisted by surfactant.

Discussion

This isolate have the ability of metabolism bioreaction of crude oil because the tendency of investment of organosulfur compounds as the sole source of sulfur [12,13]. This colony could contain some bacteria such as multi strains of *Acidithiobacillus* which have the ability to desulfurize or defrade the crude oil and its derivative [14,15]. But mainly, 9k medium encourages the growth of the strains of *thiobacillus* [16,17] in addition to preferential tendency to medium PTCC 105 [11,18]. It was founded that 9k medium can extract four stains of *Acidithiobacillus ferrooxidans* which have been identified by phenotypic and 16S rDNA sequence analyses as shown in Figure 3. These isolates could make use of Fe^{2+} , S, or pyrite as a sole source of energy in different activities in various preferences of pH, temperature, resistance to chloride (KCl) and heavy metal ions, and oxidation rates of Fe^{2+} , S and pyrite [10]. In general, 9k medium and its similar give the *Acidithiobacillus* strains as mentioned by ATCC [19] and shown by PTCC in Table 2.

The pH value of 9k medium gives a hint that the predominant microorganisms in the colony are *Acidithiobacillus ferrooxidans* strains, because the *Acidithiobacillus thiooxidans* strains prefer higher pH values, i.e., lower acidity. Therefore, *Acidithiobacillus ferrooxidans* ATCC 23270 is applied in bioleaching or biomining due to the acidity of microorganism and Fe ions in 9k medium [20]. The lower efficiency can explain the presence of Biodegradation (BDG) microorganism as in the case *Acidithiobacillus* strains on some organosulfur compounds [21]. Also, the lower efficiency can be attributed to the competence among various biological strains in colony and chemical species in medium [22]. Due to the limited rate of BDS in addition to the chemical methods such as HDS, then sometimes deep desulfurization is studied and applied such as the physical methods like extraction to improve the quality of fuels [23], and deep biodegradation for the environmental improvement. These different pathways are shown in Figure 3.

Conclusions

It was found that the heavy crude oil can produce bacteria strains which have the ability of BDS. This isolate colony was able on bioupgrade in addition to the biodesulfurization. For more accurately, this colony can be purified to get pure cultures such as *Acidithiobacillus ferrooxidans*. This can give clearer philosophy of each microorganisms functions as BDS or BDG because the competence among the various microorganisms on the sources of sulfur compounds in crude oil. Whereas, in the case of pure culture, the efficiency of desulfurization can be increased significantly.

References

- Sadare OO, Obazu F, Daramola MO. Biodesulfurization of petroleum distillates—current status, opportunities and future challenges. *Environments*. 2017; 4: 85.
- Rashidi S, et al. Removal of sulfur and nitrogen compounds from diesel fuel using MSU-S. *Iran J Oil Gas Sci Technol*. 2015; 4: 1-16.
- Pacheco M, Paixão SM, Silva TP, Alves L. On the road to cost-effective fossil fuel desulfurization by *Gordonia alkanivorans* strain 1B. *RSC Adv*. 2019; 9: 25405-13.
- Yen TF, Mei H, Lu SH-M. Oxidative desulfurization of fossil fuels with ultrasound. 2002. Google patents.
- Chen S, Zhao C, Liu Q, Zhang X, Sun S, Zang M. Biodesulfurization of diesel oil in oil–water two phase reaction system by *Gordonia* sp. SC-10. *Biotechnol Lett*. 2019; 41: 547-54.
- Jasim IM, Al-Kubaisi AA, Obaidy AMJA. Test the efficiency of some plants in the tolerant of air pollution within the City of Baghdad. *Iraq. Baghdad Sci J*. 2018; 15: 0009.
- Ahmad A, Zamzami MA, Ahmad V, Al-Thawadi S, Akhtar MS, Khan MJ. Bacterial biological factories intended for the desulfurization of petroleum products in refineries. *Fermentation*. 2023; 9: 211.
- Mohebbi G, Ball AS. Biodesulfurization of diesel fuels—past, present and future perspectives. *Int Biodeterior Biodegrad*. 2016; 110: 163-80.
- Panyushkina AE, Tsaplina IA, Kondrat'eva TF, Belyi AV, Bulaev AG. Physiological and morphological characteristics of acidophilic bacteria *Leptospirillum ferriphilum* and *Acidithiobacillus thiooxidans*, members of a chemolithotrophic microbial consortium. *Microbiology*. 2018; 87: 326-38.
- Chen H, Yang B, Chen X. Identification and characterization of four strains of *Acidithiobacillus ferrooxidans* isolated from different sites in China. *Microbiol Res*. 2009; 164: 613-23.
- PTCC, Official website of Persian Type Culture Collection. Available from: <https://irost.org/ptcc/en/micro-organism-databases>.
- Kalita M, Chutia M, Jha DK, Subrahmanyam G. Mechanistic understanding of *Gordonia* sp. in biodesulfurization of organosulfur compounds. *Curr Microbiol*. 2022; 79: 82.
- Alkhalili BE, Yahya A, Abraham N, Ganapathy B. Biodesulfurization of sour crude oil. *Mod Appl Sci*. 2017; 11: 104-13.
- Wen H, Yan J, Wu L, Chang X, Ye W, Zhang H, et al. Desulfurization of hydrophilic and hydrophobic volatile reduced sulfur with elemental sulfur production in denitrifying bioscrubber. *Chemosphere*. 2023; 316: 137806.
- Baghaie AH, Daliri A. Effect of sulfur granular, iron sulfate, and *Thiobacillus* bacteria on biodegradation of diesel oil. *J Adv Environ Health Res*. 2022; 10: 73-82.
- Nie H, Yang C, Zhu N, Wu P, Zhang T, Zhang Y, et al. Isolation of *Acidithiobacillus ferrooxidans* strain Z1 and its mechanism of bioleaching copper from waste printed circuit boards. *J Chem Technol Biotechnol*. 2015; 90: 714-21.
- Wang YJ, Li H, Wei A, Li DP. A novel liquid mixture in iron chemical-biological process using immobilized *Acidithiobacillus ferrooxidans*. *Adv Mater Res*. 2013; 610-613: 368-71.
- Al-Khazaali W, Ataei S. Optimization and Utilization of Biodesulfurization of Heavy Sour Crude Oil. Available at SSRN 4372013.
- ATCC, ATCC. Medium: 2436 9K medium for *Acidithiobacillus ferrooxidans*.
- Valdés J, Pedroso I, Quatrini R, Dodson RJ, Tettelin H, Blake R, et al. *Acidithiobacillus ferrooxidans* metabolism: from genome sequence to industrial applications. *BMC Genomics*. 2008; 9: 597.
- Primadani IPP, Ratnaningsih R, Rinanti A. Removal of crude oil by *Thiobacillus* sp. and *Clostridium* sp. at various temperatures and concentration of pollutant in liquid media. in IOP Conference Series. *IOP Conf Ser.: Mater Sci Eng*. 2021; 1098.
- Sikkander M. Bio desulfurization of Petroleum. *Petro Chem Indus Intern*. 2022; 155: 153.
- Qader IB, Kareem JH, Ismail HK, Mahmood HK. Novel phenolic deep eutectic solvents for desulfurisation of petrodiesel. *Karbala Int J Mod Sci*. 2021; 7: 33640.